





DRAWING LEGEND	
	SHEAR TRANSFER PER SCHEDULE LIMITS OF SHEAR WALL □ POST FOR THAT CHORD OF SW. □ POST FOR THAT CHORD OF SW. SHEAR WALL LENGTH
	HOLD DOWN AT LEVEL INSTALLED ANCHORAGE PER SHEAR WALL SCHED. SHEAR WALL ABOVE SHOWN DASHED
	SHEAR WALL NUMBER PER SCHEDULE AND STRUCTURAL CALCULATIONS
	A= 8d NAILS 6= NAIL SPACING
	B= 10d NAILS 4= NAIL SPACING
	DOUBLE SIDED SHEAR WALL
	BUILDING GRID LINES
	DETAIL BUBBLE (DETAIL NUMBER OVER SHEET NUMBER)
	FRAMING ELEVATION (ELEVATION NUMBER OVER SHEET NUMBER)
	LINE OF BLOCKING W/ EN-STRAP AND LIMITS OF BLOCKING PER PLAN
	BOUNDARY NAILING
	BEAM PER STRUCTURAL CALCS
	POST PER SCHED
	WOOD MEMBER CONTINUOUS
	WOOD MEMBER BLOCKING
	STRUCTURAL STEEL SHAPE
	REVISION NUMBER
	REVISED AREA
	BEARING WALL BELOW
	WALL BELOW
	WALL ABOVE

PRODUCT SUBSTITUTIONS	
1.	MATERIAL SUBSTITUTIONS SHALL BE SUBMITTED TO THE ENGINEER FOR REVIEW PRIOR TO USE. SUBSTITUTION REVIEWS MAY REQUIRE ADDITIONAL DESIGN COSTS. THESE ADDITIONAL COSTS SHALL BE PAID BY THE PERSON OR COMPANY REQUESTING THE SUBSTITUTION.
2.	SUBSTITUTED PRODUCTS SHALL HAVE I.C.C. APPROVAL AND SHALL BE INSTALLED PER PRODUCT MANUFACTURER'S SPECIFICATIONS. SUBSTITUTED PRODUCT MATERIALS, FINISHES, DETAILS AND INSTALLATION SHALL BE OF A NATURE SIMILAR TO ORIGINALLY SPECIFIED PRODUCT SO AS TO NOT CONFLICT WITH ANY INTENDED STRUCTURAL OR ARCHITECTURAL DESIGN CONDITIONS, WHETHER DEPICTED OR IMPLIED ON PLANS OR SPECIFICATIONS. THE SUBSTITUTED PRODUCT SHALL HAVE DESIGN VALUES (I.E. DESIGN LOADS, IMPACT RESISTANCE, ETC.) WHICH SHALL BE EQUAL TO OR GREATER THAN THE ORIGINALLY SPECIFIED PRODUCT. ANY AND ALL WARRANTIES OFFERED BY THE ORIGINALLY SPECIFIED PRODUCT MANUFACTURER FOR THE ITEM TO BE SUBSTITUTED SHALL HAVE SIMILAR WARRANTIES OFFERED BY THE SUBSTITUTED PRODUCT MANUFACTURER.
3.	SUBMIT TO THE ENGINEER A LIST OF ONLY THE ITEMS TO BE SUBSTITUTED, COMPLETE WITH ALL PERTINENT MATERIAL INCLUDING BUT NOT LIMITED TO MANUFACTURER'S SUPPLIED DESIGN LOADS LISTED FOR THE ORIGINALLY SPECIFIED PRODUCT AND THE PROPOSED SUBSTITUTION PRODUCT.

HARDWARE NOTE	
1.	ALL METAL CONNECTORS SPECIFIED ARE MANUFACTURED BY "SIMPSON STRONG-TIE." U.N.O. TO SUBSTITUTE CONNECTORS. CONTRACTOR SHALL PROVIDE ALL DOCUMENTATION ON THE PROPOSED SUBSTITUTION TO THE ENGINEER, FOR REVIEW AND APPROVAL, PRIOR TO PLACING ANY ORDER FOR THE METAL CONNECTOR(S). IN THE EVENT A SUBSTITUTE IS USED WITHOUT THE ENGINEERS APPROVAL, THE CONTRACTOR BARES ALL THE RESPONSIBILITY AND COSTS FOR THE REPLACEMENT OF THE CONNECTOR(S). THE ENGINEERS APPROVAL AND FOR RESUBMITTAL TO THE BUILDING DEPARTMENT AS APPLICABLE.

CARPENTRY

1. ALL CARPENTRY SHALL CONFORM TO THE CONVENTIONAL CONSTRUCTION PROVISIONS OF THE IBC. SECTION 2320 UNLESS DETAILED OTHERWISE.
2. ALL STUD WALLS FULL HEIGHT, CONTINUOUS TO BOTTOM OF FLOOR JOISTS, CEILING JOISTS, RAFTERS OR TRUSSES.
3. ALL EXT. STUD WALLS GREATER THAN 10 FEET HIGH SHALL HAVE 2X6 STUDS @ 16" O.C. UNO.
4. THE CONTRACTOR SHALL VERIFY THAT THE MOISTURE CONTENT OF ALL FRAMING LUMBER AND PLYWOOD DOES NOT EXCEED 18% AT THE TIME OF INSTALLATION AND AT CLOSE-IN. THE CONTRACTOR SHALL PROVIDE ALLOWANCES FOR DIFFERENTIAL SHRINKAGE BETWEEN FLOORS, ETC.
5. LUMBER SHALL BE GRADE MARKED IN ACCORDANCE WITH "STANDARD GRADING AND DRESSING RULES" OF THE AMERICAN LUMBER STANDARDS COMMITTEE.
6. UNLESS OTHERWISE NOTED, ALL FRAMING LUMBER SHALL BE SPRUCE PINE/FIR MEET OR EXCEED THE FOLLOWING COMMERCIAL GRADES:
STUDS LESS THAN 10' PLATES AND BLOCKING: STD. OR STR. JOISTS RAFTERS & STUDS GREATER THAN 10': #1/#2 4x4 & 6x POSTS & 6x BEAMS: #1 (DOUGLAS FIR)
7. WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED DOUGLAS FIR CONFORMING TO ANFPL LP-2 STANDARD. WOOD POSTS EMBEDDED IN CONCRETE OR EARTH SHALL BE PRESSURE TREATED TO THE ANFPL LP-2 STANDARD.
8. STRUCTURAL PLYWOOD SHALL BE CD GRADE WITH EXTERIOR GLUE CONFORMING TO PS-1/PS-2 OF THE AMERICAN PLYWOOD ASSOCIATION UNLESS OTHERWISE NOTED.
9. PLYWOOD SHEATHING NAILS SHALL BE DRIVEN FLUSH BUT SHALL NOT FRACTURE THE SURFACE OF THE SHEATHING.
10. ALL NAILING NOT SPECIFICALLY CALLED OUT ON PLANS SHALL BE PER TABLE 2303.4.5 OF THE INTERNATIONAL BUILDING CODE. SEE DETAIL 1/5D1.
11. NAILS SHALL BE COMMON WIRE EXCEPT THAT NAILS USED IN EXTERIOR APPLICATIONS SHALL BE GALV. (VANADIZED BOX WHERE WOOD TENDS TO SPLIT, REPLACE MEMBER AND PRE DRILL HOLES.
12. JOISTS, HANGERS, METAL CONNECTORS AND OTHER MEMBERS AND TIE-BACK CONNECTORS SHALL BE PER SIMPSON CO., SAN LEANDRO, INTERNATIONAL. NAIL OR BOLT AT ALL PRE-DRILLED HOLES, PER MANUFACTURERS INSTRUCTIONS, UNLESS OTHERWISE NOTED. USE ONLY SIMPSON "N" TYPE NAILS PER MANUFACTURER'S SPECIFICATIONS. ALTERNATES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO INSTALLATION.
13. MACHINE BOLTS AND ANCHOR BOLTS SHALL CONFORM TO ASTM. MISCELL. PREVIOUS TIE-BACK CONNECTORS SHALL NOT WHERE BEARING IS AGAINST WOOD. BOLT HOLES IN WOOD SHALL BE 1/16" LARGER THAN BOLT SIZES, UNLESS OTHERWISE NOTED. NUTS SHALL BE TIGHTENED WHEN PLACED AND RETIGHTENED BEFORE CLOSING IN.
14. SOLID BLOCK UNDER ALL BEAMS AND POSTS TO PROVIDE CONTINUOUS SUPPORT TO FOUNDATION OR POST BELOW.

STRUCTURAL COMPOSITE LUMBER (SCL)

A. SCL SHALL BE LAMINATED VENEER OR PARALLEL STRAND LUMBER.

- I. 1 1/4" THICK SCL MEMBERS SHALL HAVE THE FOLLOWING MIN. PROPERTIES:

E = 2.0 x 10 ⁶ PSI
F _b = 2600 PSI
F _v = 285 PSI
F _c (PARL.) = 100 PSI
F _c (PARL.) = 2350 PSI
- II. 3 1/2" TO 7" THICK SCL MEMBERS SHALL HAVE THE FOLLOWING MIN. PROPERTIES (EXCEPTS 2x1 1/4" SCL BEAM):

E = 2.0 x 10 ⁶ PSI
F _b = 2600 PSI
F _v = 285 PSI
F _c (PERP.) = 100 PSI
F _c (PARL.) = 2350 PSI
- III. 9 1/2x14" SCL MEMBERS SHALL HAVE THE FOLLOWING MIN. PROPERTIES:

E = 1.5 x 10 ⁶ PSI
F _b = 2350 PSI
F _v = 285 PSI
F _c (PERP.) = 100 PSI
F _c (PARL.) = 2150 PSI

B. MULTIPLE PIECE SCL BEAMS SHALL NOT BE SUBSTITUTED FOR FULL SIZE SCL BEAMS UNLESS SPECIFICALLY NOTED.

C. NAIL BUILT-UP 1 3/4" THICK SCL BEAMS WITH THREE ROWS OF 16d NAILS AT 12" O.C. STAGGERED, TYPICAL UNO.

WALL BRACING

UNLESS OTHERWISE NOTED ON PLANS/SHEAR WALL SCHED. ALL WALLS SHALL BE BRACED AS FOLLOWS:

- I. A. ALL TOP FLOOR EXTERIOR WALLS AND MAIN CROSS-STUD PARTITIONS SHALL BE BRACED BY ONE OF THE FOLLOWING:
 1. GYPSUM BOARD (SHEATHING 1/2 INCH THICK BY 4 FEET WIDE WALL OR DOUBLE TOP PLATE OR BEAM, HOLD-DOWNS OVER 24" O.C. AND NAILED AT 7 INCHES ON CENTER TO ALL EDGES INCLUDING ALL BLOCKS (IF REQUIRED), PLATES AND STUDS WITH NAILS AS REQUIRED BY IBC. TABLE NO. 2308.5.
 2. PLYWOOD SHEATHING OR SIDING WITH A THICKNESS NOT LESS THAN 3/8 INCH IN ACCORDANCE WITH THE IBC, TABLE 2308.6.1; TABLES 2308.6.3
- B. ALL EXTERIOR WALLS AND MAIN CROSS STUD PARTITIONS BELOW THE TOP STORY AND ALL EXTERIOR CRIPPLE WALLS SHALL BE SHEATHED IN ACCORDANCE WITH
 (X) TYP. UNO.

GYF. BD. NAILING

ALL GYPSUM BOARD FLOOR, CEILING, WALL AND FLOOR COVERINGS SHALL BE NAILED (OR SCREWED) CONSISTENT WITH IBC, TABLE 2503.5 AT ALL EDGES AND INTERIOR SUPPORTING MEMBERS. PROVIDE HOLDING SECURELY CONNECTED TO ADJACENT FLOOR, FLOOR OR WALL ELEMENTS AT ALL GYPSUM BOARD EDGES.

SHEARNALL NOTES

1. WHERE A SHEARNALL IS INDICATED ON PLANS THE SHEARNALL ASSEMBLY SHALL RUN HORIZONTALLY AND CONTINUOUSLY TO THE NEAREST WALL OPENING OR END OF THE WALL; THE SHEARNALL ASSEMBLY SHALL RUN VERTICALLY CONTINUOUSLY FROM THE BOTTOM OF THE NEAREST SOLE OR BOTTOM PLATE UP TO THE NEAREST DOUBLE TOP PLATE OR BEAM, AND ALL PLYWOOD PANEL EDGES SHALL BE BLOCKED AND EDGE NAILED.
2. WHERE HOLD-DOWN POSTS OR STUDS ARE INDICATED AT THE END OF A SHEARNALL, THE SHEAR PLYWOOD SHALL BE EDGE NAILED AND THE POST SHALL RUN CONTINUOUSLY FROM THE SOLE PLATE TO THE DOUBLE TOP PLATE OR BEAM. HOLD-DOWNS SHALL BE ATTACHED TO POSTS AT THE ENDS OF SHEARNALLS AND SHALL EXTEND TO EITHER FRAMING BELOW OR TO FOUNDATION AS SHOWN ON PLANS. IF HOLD-DOWNS ARE SPECIFIED AT EXISTING FOUNDATION, USE SIMPSON "SET" TYPE EPOXY ANCHORS INSTALLED PER MANUFACTURERS RECOMMENDATIONS.
3. SEE SHEARNALL SCHEDULE FOR SHEARNALL REQUIRED NAILS, ANCHOR BOLTS, BILL NAILS, AND OTHER SHEAR TRANSFER HARDWARE.
5. SHEARNALL PLYWOOD SHALL NOT BE CUT FOR PIPE, DUCTS, SLEEVES, ETC. UNO. OR DETAILED.

JOB SITE NOTES

1.

CONC. WASHOUTS TO BE CONTAINED ON THE PROPERTY.

2.

CONTAMINATED WATER SHALL BE CONTAINED ON THE PROPERTY OR REMOVED IN THE CONCRETE TRUCK

3.

CONTRACTOR SHALL CLEAN ALL MUD & DEBRIS TRACKED ONTO THE ROAD SURFACES DUE TO CONSTRUCTION, DAILY.

4.

CONTRACTOR TO MAINTAIN A CLEAN AND SAFE JOB SITE AND ELIMINATE ALL INVITING HAZARDS ON A DAILY BASIS, AND SHALL CONFORM TO ALL 'O.S.H.A.' AND OTHER SAFETY REGULATIONS.

5.

CONTRACTOR TO TAKE ANY AND ALL MEASURES TO PROTECT THE LUMBER AND MATERIAL SUPPLY STACKS FROM HARMFUL WEATHER CONDITIONS.

FOUNDATION RELATED SITE WORK

1.

NOTIFY ENGINEER IF NATIVE SOIL CONDITIONS REVEAL UNEXPECTED/DIFFICULT CONDITIONS SUCH AS LEDGE AND/OR CLAY. FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM BEARING CAPACITY OF 1500 PSF.

2.

COMPACT DISTURBED LOAD-BEARING SOIL IN DIRECT CONTACT WITH FOUNDATIONS TO ORIGINAL BEARING CAPACITY. PLACE 6" OF 1/2" CRUSHED STONE BENEATH SPREAD FOOTINGS IF STANDING WATER OR CLAY SOILS ARE ENCOUNTERED IN EXCAVATIONS.

3.

IF OVER-EXCAVATION OCCURS, REPLACE MATERIAL WITH SUITABLE WELL-DRAINED MATERIAL, IN 6" LIFTS, APPROVED BY THE ENGINEER AND COMPACTED TO 98% OF STANDARD PROCTOR. OVER-EXCAVATION MAY ALSO BE REPLACED WITH LEAN CONCRETE WITH ENGINEER'S APPROVAL.

4.

PLACE AND COMPACT SLOPE AND STEMMALL CONTINUOUS LAYERS NOT EXCEEDING 8" OF COMPACTED DEPTH FOR HAND HELD COMPACTION EQUIPMENT AND A MAXIMUM 12" COMPACTED DEPTH FOR VIBRATORY ROLLERS.

5.

BACKFILL MUST HAVE PROVEN CONTENT OF BACKFILL MATERIALS TO ATTAIN COMPACTION DENSITY.

6.

BACKFILL SIMULTANEOUSLY ON EACH SIDE OF FROST WALLS.

CONCRETE/FOUNDATION/SITE NOTES

1.

ALL CONCRETE WORK SHALL CONFORM TO THE REQUIREMENTS OF ACI 318-05, "SPECIFICATIONS FOR THE STRUCTURAL CONCRETE FOR BUILDINGS."

2.

ALL FOUNDATION FOOTINGS AND STEMMALL CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI AT 28 DAYS U.N.O. (DESIGN BASED ON 2,500 PSI)

3.

ALL CONCRETE SHALL BE REGULAR WEIGHT HARDPOCK. CONCRETE WEIGHING APPROXIMATELY 150 PCF. AGGREGATES SHALL CONFORM TO ASTM D50 (TYPE II) UNLESS CONCRETE WILL BE IN CONTACT WITH ALKALINE SOILS.

4.

ALL FOUNDATIONS SHALL BEAR ON FIRM, UNDISTURBED, NATIVE SOILS OR ENGINEERED FILLS AT OR EXCEEDING DEPTHS SHOWN ON DRAWINGS.

5.

ALL FOOTING EXCAVATIONS SHALL BE NEAT.

6.

OVER-EXCAVATIONS IN DEPTH AND WIDTH SHALL BE FILLED WITH CONCRETE. ALL LOOSE SOILS SHALL BE REMOVED FROM EXCAVATIONS PRIOR TO ANY REINFORCEMENT OF CONCRETE.

7.

REINFORCING, ANCHOR BOLTS AND INSERTS SHALL BE RIGIDLY HELD IN PLACE PRIOR TO PLACING CONCRETE.

8.

ALL WOOD IN PERMANENT CONTACT WITH CONCRETE OR SOIL SHALL BE PRESSURE TREATED U.N.O.

REINFORCING STEEL

1.

ALL REINF. STL. SHALL BE DEFORMED STL. BARS CONFORMING TO ASTM. A615, GR. 60, FOR #5 & LARGER AND GR. 40 FOR #4 & SMALLER STL. SHALL BE KEPT CLEAN AND FREE OF RUST AND SCALE

2.

ALL REINF. STEEL SHALL CONFORM TO ASTM A615 (TYPE I) FABRICATED & PLACED IN ACCORDANCE W/ ACI, 318R, 318S, AND SP66.

3.

WELDED WIRE FABRIC SHALL CONFORM TO ASTM. A185, IN AS LONG A LENGTH AS IS PRACTICABLE. WELDED WIRE FABRIC SHALL BE LAPPED AT LEAST ONE GRID WIDTH + 2".

4.

REINFORCING BARS SHALL BE IN LENGTHS AS LONG AS PRACTICABLE. REINFORCING BARS REQUIRING BENDING IN THE FIELD SHALL BE "COLD BENT". AT CORNERS AND INTERSECTIONS BARS SHALL RETURN A MINIMUM OF 18". ALL BAR SPLICES SHALL HAVE 24" LAPS MINIMUM U.N.O.

5.

SPLICES:

IN CONC.

IN MAS.

#3

18"

24"

#4

24"

30"

#5

30"

36"

#6

36"

42"

6.

PLACEMENT:

CONC.

DEPOSITED AGAINST EARTH

8"

FORMED CONCRETE BACK FILLED

16"

EXT. FACES OF WALLS

1 1/2"

INT. FACES OF WALLS

9"

T.O. SLAB ON GRADE (COVERED)

3 1/4"

7.

REINFORCING BARS SHALL BE ACCURATELY PLACED & SUPPORTED BY CONC. METAL, OR OTHER APPROVED CHAIRS, SPACERS, OR TIES AND SECURED AGAINST DISPLACEMENT DURING CUR, OR CURE PLACEMENT.

8.

EXCEPT WHERE OTHERWISE NOTED, REINF. SHALL HAVE CONC. COVER AS FOLLOWS:

SHOP DRAWINGS (AS REQUIRED)

PROVIDE SHOP DRAWINGS AND MILL CERTIFICATES FOR ALL STEEL WORK TO THE ENGINEER FOR REVIEW AND APPROVAL PRIOR TO ANY FABRICATION

STEEL NOTES

1.

ALL WORK SHALL BE IN CONFORMANCE WITH THE AISC SPECIFICATION FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS, LATEST EDITION.

2.

ALL STRUCTURAL WELDING SHALL BE DONE IN ACCORDANCE WITH AWS D11-LATEST EDITION AND SHALL HAVE SPECIAL CONTINUOUS INSPECTION PER USC SECTION 11. ALL SPECIAL INSPECTIONS SHALL BE DONE BY AN INDEPENDENT TESTING AGENCY. ALL SPECIAL INSPECTED WORK SHALL CONFORM TO AN APPROVED DETAIL. ANY DISCREPANCIES SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGR.

3.

EXCEPTION: ALL SINGLE-PASS FILLET WELDS MAY HAVE PERIODIC INSPECTION WITH PRIOR SEPARATE APPROVAL OF THE BUILDING OFFICIAL UNLESS OTHERWISE NOTED AS CONTINUOUS INSPECTION REQUIRED.

4.

ALL SHOP AND FIELD WELDERS SHALL BE CERTIFIED ACCORDING TO AISC PROCEDURES FOR THE WELDING PROCESS AND WELDING POSITION USED.

5.

STEEL PLATES & SHAPES SHALL CONFORM TO ASTM. A36 GR. 36.

6.

STEEL TUBES SHALL CONFORM TO ASTM. A500, GRADE B.

7.

STEEL PIPES SHALL CONFORM TO ASTM. A501 OR ASTM. A53, GR. B.

8.

WELD METAL SHALL MATCH BASE METAL WITH A MINIMUM OF 70 T.SI.

9.

ALL STEEL EXPOSED TO WET CONDITIONS SHALL BE GALV.

10.

CONTRACTOR TO FIELD VERIFY ALL STEEL DIMENSIONS IN FIELD PRIOR TO ORDERING AND FABRICATION OF STEEL COMPONENTS.

	GENERAL NOTES
1.	ALL WORK SHALL BE IN ACCORDANCE WITH THE INTERNATIONAL BUILDING CODE, 2015 EDITION, AS ADOPTED BY THE LOCAL GOVERNING AGENCY, AND ANY APPLICABLE LOCAL ORDINANCES.
2.	THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY DISCREPANCIES ON DRAWINGS REQUIRING CLARIFICATION OR REVISIONS BEFORE COMMENCING WITH THE WORK.
3.	DRAWINGS SHALL NOT BE SCALED. ALL DIMENSIONS RELATED TO EXISTING CONDITIONS SHALL BE VERIFIED BY THE CONTRACTOR.
4.	NOTES AND DETAILS ON DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS.
5.	WHERE NO DETAILS ARE SHOWN, CONSTRUCTION SHALL BE OF SAME NATURE AS SIMILAR CONDITIONS ON THE PROJECT.
6.	DETAILS MAY BE DEPICTED DIAGNOMATICALLY. FOR EXAMPLE, ROOF PITCH, FLOOR/ROOF/WALL THICKNESSES, FRAMING MEMBERS, ETC., MAY DIFFER IN SCALE FROM ACTUAL PROPOSED CONDITIONS. DETAILS SHALL BE UNDERSTOOD IN CONJUNCTION WITH OTHER DRAWINGS CONVEYING STRUCTURAL AND ARCHITECTURAL DESIGN INTENT.
7.	SEE ARCHITECTURAL DRAWINGS FOR WALL LOCATIONS AND DIMENSIONS, UNLESS OTHERWISE NOTED.
8.	SEE ARCHITECTURAL DRAWINGS FOR FINISH FLOOR ELEVATIONS, FLOOR DEPRESSIONS, OPENINGS, SLOPES, DRAINS, CURBS, PADS, EMBEDDED ITEMS, NON-BEARING PARTITIONS, STAIRS, ETC. REFER TO CIVIL, MECHANICAL AND ELECTRICAL DRAWINGS FOR UTILITY, PIPES, DUCTS, EQUIPMENT, ETC.
9.	DIMENSIONS, UNLESS OTHERWISE SHOWN, ARE TO CENTERLINE OF COLUMNS AND BEAMS, OR TO THE FACE OF CONCRETE SURFACES AND ROUGH FRAMING.
10.	SHOP DRAWINGS ARE AN AID FOR FIELD PLACEMENT AND ARE SUPERSEDED BY THE STRUCTURAL DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO MAKE CERTAIN THAT ALL CONSTRUCTION IS IN FULL AGREEMENT WITH THE LATEST APPROVED PLANS.
11.	THE CONTRACT STRUCTURAL DRAWINGS AND SPECIFICATIONS REPRESENT THE FINISHED STRUCTURE, AND, EXCEPT WHERE SPECIFICALLY SHOWN, DO NOT INDICATE THE METHOD OR MEANS OF CONSTRUCTION. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, PROCEDURES, TECHNIQUES, MATERIALS AND SEQUENCING.
12.	THE ENGINEER IS NOT IN RESPONSIBLE CONTROL, OR CHARGE OF, AND SHALL NOT BE RESPONSIBLE FOR THE SAFETY PRECAUTIONS AND PROGRAMS IN ASSOCIATION WITH THE WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTRACTOR SUBCONTRACTOR OR ANY PERSONS PERFORMING ANY OF THE WORK, OR FOR THE FAILURE OF ANY OF THEM TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
13.	ALL SHORING AND BRACING DESIGN MATERIALS AND INSTALLATION SHALL BE PROVIDED BY THE GENERAL CONTRACTOR. SHORING AND BRACING SHALL BE LEFT IN PLACE AS LONG AS MAY BE REQUIRED FOR SAFETY AND UNTIL STRUCTURAL CONSTRUCTION IS COMPLETE. THE CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO CONSTRUCTION IF ALTERNATES OR SUBSTITUTIONS ARE DESIRED.
	TRUSS ROOF FRAMING NOTES
1.	SEE SHEET SD1 FOR STANDARD CONSTRUCTION DETAILS, GENERAL STRUCTURAL NOTES AND SHEAR WALL SCHEDULE.
2.	$\frac{3}{8}$ " APA RATED EXP. I PI (32/16) FLY, W 2d @ 6' O.C. AT ALL PRIMARY SUPPORTING EDGES & 6' O.C. FIELD STAGGS. SHEET'S TYPE.
3.	FOR TRUSS SHAPES, DIMENSIONS, ETC., SEE ARCHITECTURAL DRAWINGS. CONTRACTOR SHALL SUBMIT DRAWINGS TO THE ENGINEER FOR REVIEW PRIOR TO FABRICATION.
4.	ROOF TRUSS MANUFACTURER SHALL PROVIDE ENGINEERED DRAWINGS KEYS TO MANUFACTURER LAYOUT DRAWINGS, CALCULATIONS, AND LAYOUT SHALL BE SUBMITTED TO AND APPROVED BY THE BUILDING DEPARTMENT PRIOR TO FABRICATION.
5.	MANUFACTURED ROOF TRUSS DESIGN LOADS. (SEE NOTES 6 AND 7 FOR ADDITIONAL SPECIAL LOADS.)
	A. TOP CHORD
	(1) DEAD LOAD = 10 P.S.F.
	(2) LIVE LOAD = 20 P.S.F. (SNOW LOAD GOVERNS 60 psf)
	B. BOTTOM CHORD
	(1) DEAD LOAD = 10 P.S.F.
	(2) LIVE LOAD = 10 P.S.F. (BOTTOM CHORD DOES NOT ACT SIMULTANEOUSLY WITH OTHER IMPOSED LIVE LOADS)
6.	SUPERIMPOSED LOADS FROM JACK TRUSSES, ARCHITECTURAL FINISHES OR SECONDARY FRAMING (i.e. OVERBUILD FRAMING, FURRED CEILINGS, SOFFITS, ETC.) SHALL BE INCLUDED IN THE DESIGN OF SUPPORTING TRUSSES.
7.	THE POSITIONS, WEIGHTS, AND METHOD OR ATTACHMENT OF ALL MECHANICAL UNITS, ELECTRICAL FIXTURES, PLUMBING, ETC. SHALL BE INCLUDED IN THE DESIGN OF THE TRUSSES BY THE TRUSS MANUFACTURER AND SHALL BE VERIFIED BY THE DESIGNER. ADDITIONAL TRUSSES OR SPECIALLY DESIGNED TRUSSES MAY BE REQUIRED.
8.	"GIRDER" TYPE TRUSSES SHALL BE DESIGNED FOR A MAXIMUM DEFLECTION UNDER DEAD PLUS LIVE LOADS AS FOLLOWS: MID SPAN 1/2" VERTICAL SUPPORTS 1/2" HORIZONTAL
9.	PROVIDE TRUSS CALCULATIONS, DETAILS AND LAYOUT PLANS TO BUILDING INSPECTOR AT TIME OF ROOF NAILING INSPECTION.
10.	TRUSS MANUFACTURER SHALL SUBMIT PROOF OF IN-PLANT INSPECTION PER IBC STANDARD 230.2 TO BUILDING DEPT AND ENGINEER WITH ENGINEERED DRAWS AND LAYOUT AS REQUIRED.
11.	TRUSS MANUFACTURER IS RESPONSIBLE FOR ALL TRUSS-TO-TRUSS CONNECTIONS AND TRUSS-TO-BEAM CONNECTORS U.O.N.
12.	PROVIDE MULTIPLE STUD AND/OR SOLID BLOCKING UNDER ALL MULTIPLE TRUSSES.
13.	ALL GIRDER TRUSSES SHALL HAVE 3-2x STUD UNDER EACH BEARING END U.O.N.
14.	CONTRACTOR WILL VERIFY REQUIREMENT FOR AND PROVIDE ALL ERECTION AND PERMANENT TRUSS BRACING AS RECOMMENDED BY TRUSS MANUFACTURER.
15.	ALL ROOF OPENINGS SHALL BE BETWEEN RAFTERS OR TRUSSES U.O.N. ON DRAWINGS.
16.	ALL HORIZ. FROM. MEMBERS SHALL BE SET W/ CROWN EDGE UP.
17.	BEAM'S SUPPORTING CONCENTRATED LOADS SHALL NOT BE NOTCHED.
18.	ALL EXTERIOR HEADERS SHALL BE PER DET. 6/52.0. PROVIDE DOUBLE TRIMMERS UNDER ALL HEADERS OVER 6 FEET.
19.	OVERBUILD FRAMING SHALL BE 2x6 RAFTERS AND 2x6 RIDGE AND HIPS U.O.N. BRACE OVERBUILD FRAMING TO TYPICAL FRAMING BELOW AT 48" O.C. MAXIMUM. TYPICAL ROOF FRAMING BRACING SHALL BE CONTINUED BELOW OVERBUILD FRAMED AREAS. PROVIDE SOLID BLOCK OR CONTINUOUS 2x FLAT MEMBER AT VALLEYS UNDER ENDS OF ALL RAFTERS.
20.	CONTRACTOR SHALL ADEQUATELY BRACE OR SUPPORT ALL PORTIONS OF THE TRUSS SYSTEM. ALL MEMBERS HAVE BEEN PERMANENTLY CONNECTED TOGETHER.

DESIGN CRITERIA

FOUND.

SECTION A
INTERNATIONAL DESIGN CODE (IBC)

VERTICAL LOADS DEAD LIVE

ROOF (3 PSF SOLAR.) (typ) 20 PSF SNOW GOVERNS PSF

WAREHOUSE (typ) 75 PSF 50 PSF

SECTION B
LOCAL BUILDING DEPARTMENT

LATERAL LOADS

GROUND SNOW LOAD, Pg 50 PSF

EXPOSURE, Ce - 1.0

IMPORTANCE - 1.0

THERMAL, Ct - 1.1

FLAT ROOF SNOW LOAD, Pf 50 PSF

DESIGN ROOF SNOW LOAD, Psf 50 PSF

SECTION C
SEISMIC DATA AND ANALYSIS

WIND: SPEED - 90 MPH EXPOSURE - C

MEAN ROOF HEIGHT "23'-9" IMPORTANCE - 1.0

SECTION D
STRUCTURAL ANALYSIS

SEISMIC:

OCCUPANCY - II SITE CLASS (ASSUMED)
IMPORTANCE - I

D
D

SEISMIC DESIGN CATEGORY C

SHORT SPECTRAL, Sds .22d+
(MD SHEAR WALLS) R 6.5 V = Sds/R*N = .0044"N

SECTION E
FOUNDATION DESIGN

ASSUMED CLASS 4 SOILS WITH AN ALLOWABLE BEARING PRESSURE OF 1500 PSF WITH A CONSTANT EXPANSION INDEX LESS THAN 20 AND AN ALLOWABLE LATERAL BEARING PRESSURE OF 200 PSF.

SECTION F
CONSTRUCTION OBSERVATION NOTES

I. IN ADDITION TO CITY INSPECTIONS AND/OR ARCHITECT SITE VISITS, HSE RECOMMENDS THAT STRUCTURAL OBSERVATION SERVICES BE PROVIDED, PER IBC SECTION 1702, TO REVIEW CONSTRUCTION FOR GENERAL CONFORMANCE WITH THE APPROVED PLANS AND TO MITIGATE THE RISK OF PROBLEMS DURING THE CONSTRUCTION PROCESS.
II. THE CONTRACTOR SHALL PHASE THE PROJECT AND COORDINATE WITH HARRIS STRUCTURAL ENGINEERING TO ENSURE THAT PRIMARY STRUCTURAL ELEMENTS OF THE CONSTRUCTION ARE OBSERVED PRIOR TO COVERING WITH FINISHES OR OTHER MATERIALS. A SPECIAL INSPECTOR IS AN ACCEPTABLE ALTERNATE TO CONSTRUCTION OBSERVATION. THE FOLLOWING STAGES AT A MINIMUM SHALL BE OBSERVED:
A. FOOTING EXCAVATIONS COMPLETED, FORMED AND READY FOR PLACEMENT OF REINFORCING.
B. FOOTING REINFORCING BARS IN PLACE.
C. SLAB-ON-GRADE REINFORCING BARS IN PLACE.
D. WOOD FRAMING COMPLETED BUT NOT CLOSED IN.
E. PLYWOOD NAILING COMPLETED BUT NOT COVERED.
F. ALL STRUCTURAL WORK COMPLETE.
III. IN THE EVENT THAT HARRIS STRUCTURAL ENGINEERING IS NOT RETAINED TO PROVIDE STRUCTURAL OBSERVATION SERVICES, IT IS UNDERSTOOD AND AGREED THAT THE SERVICES PERFORMED BY HARRIS STRUCTURAL ENGINEERING ARE LIMITED TO THE DESIGN AND PREPARATION OF BASIC STRUCTURAL CONCEPTS AND CONSTRUCTION DOCUMENTS AND THAT HARRIS STRUCTURAL ENGINEERING HAS NO CONTROL WHATSOEVER WITH REGARD TO CONSTRUCTION METHODS OR COMPLIANCE WITH THE APPROVED PLANS. CONTACT THE OFFICE OF HARRIS STRUCTURAL ENGINEERING IF STRUCTURAL OBSERVATION SERVICES ARE DESIRED.

SECTION G
USE OF ENGINEERS' DOCUMENTS

THESE DOCUMENTS PREPARED BY HARRIS STRUCTURAL ENGINEERING ARE INSTRUMENTS OF PROFESSIONAL SERVICE FOR USE SOLELY WITH RESPECT TO THIS PROJECT, AND SHALL REMAIN THE PROPERTY OF HARRIS STRUCTURAL ENGINEERING. HARRIS STRUCTURAL ENGINEERING SHALL RETAIN ALL COMMON LAW, STATUTORY, AND OTHER RESERVED RIGHTS INCLUDING THE COPYRIGHT(S). THE OWNER SHALL NOT REUSE OR PERMIT THE REUSE OF THESE DOCUMENTS, IN WHOLE OR IN PART, INCLUDING ANY DESIGN & CONSTRUCTION DEVELOPMENT, CHANGES OR ALTERATIONS TO THESE DOCUMENTS WITHOUT THE WRITTEN ACKNOWLEDGEMENT AND AUTHORIZATION OF HARRIS STRUCTURAL ENGINEERING. ANY UNAUTHORIZED USE, REUSE, MODIFICATION OR ALTERATION, INCLUDING AUTOMATED REPRODUCTION, OF THESE DOCUMENTS SHALL BE AT THE USER'S SOLE RISK WITHOUT LIABILITY OR LEGAL EXPOSURE TO HARRIS STRUCTURAL ENGINEERING.

PLAN NOTES: SEE SN & SDI FOR NOTES & DETAILS

6 FOUND. SET




1. REFER TO PLAN FOR TOP OF SLAB ELEVATION. REFERENCE ELEVATION OF 0.00 IS 1ST FLOOR DATUM ELEVATION OF 105.10(2'). VERIFY W/ CIVIL & ARCH.

2. [XX-YY'] = TOP OF Ftg. Elev. & (XX-YY') = TOP OF PIER ELEV.

3. REFER TO FOOTING SCHED.

4. REFER TO TYPICAL SLAB ON GRADE DETAILS.

COLUMN SCHEDULE		
POST #	SIZE	SYMBOL
1	4x4 # D.F. or 3/2 SQ. PSL POST	
2	4x6 # D.F. or 3/2x5/4 PSL POST	
3	6x6 # D.F. or 5/4 SQ. POST	
4	DOUBLE STUDS	
5	TRIPLE STUDS	
6	H55 5x5x3/8	
7	12x12 HEM FIR #1 OR BTR.	
8	15x15 HEM FIR #1 OR BTR.	

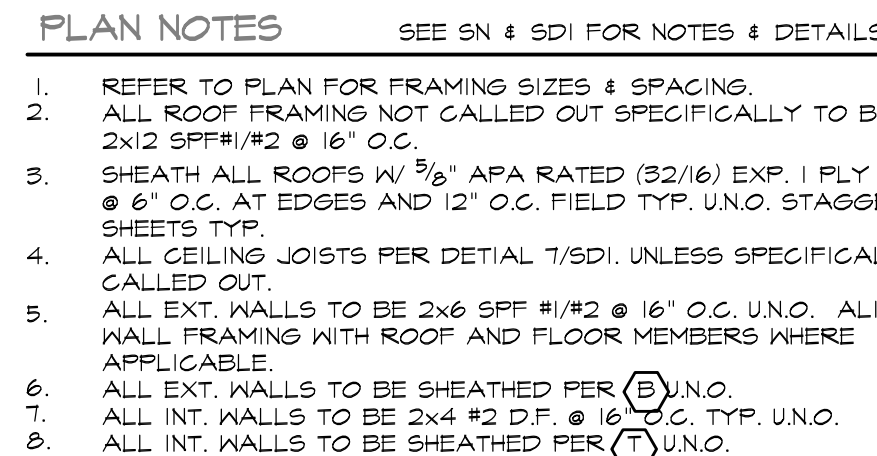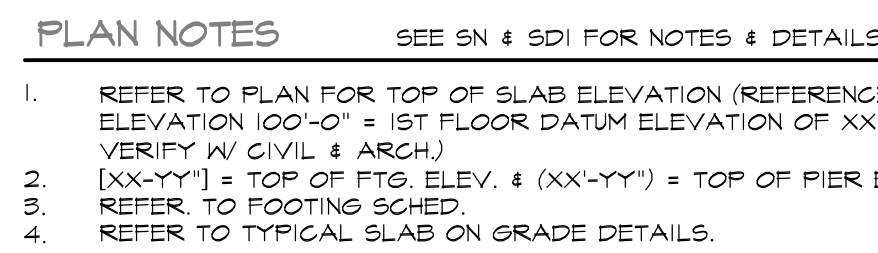

FOUNDA TION

00011207

$$\begin{array}{c} \times \\ \triangleleft \\ \parallel \\ \nabla \\ \underline{\quad} \\ \triangleleft \\ \parallel \end{array}$$

REVISIONS

DB : 26016

OT 04 28 3076

S

CONNECTION	CONN. NOT LISTED SHALL BE PER IBC 2304.10.	NAILING
------------	---	---------